

Wood Pellet Stove

301340 Wood Pellet Stove ADEL – Black

Certification: Class A++, output 13 kW, consumption 3 kg/h, ECODESIGN 2022



1 Description:

A wood pellet stove is an economical, ecological and responsible solution. Thanks to the calorific power of pellets and the high performance of the units, efficiency exceeds 90%. The models are built with high-quality materials and feature special characteristics that distribute heat evenly for longer, achieving a very pleasant space.

They are also very simple to use. You only need to select the desired temperature and the stove automatically heats the room until it reaches the set temperature, keeping it constant.

Pellet stoves operate connected to the electrical mains (230V/50Hz).

PELLET: RENEWABLE ENERGY

It is an ecological fuel with very low moisture content, made from sawdust or other by-products of the plant kingdom. Pellets are CO₂-neutral and burn completely, generating minimal ash residue. The European standard for pellets is UNE-EN ISO 17225-2:2014.



2 Technical Specifications:

Model

Adel, wood pellet stove, ductable, with weekly programming.
Colour options: Black
Optional accessory for Wi-Fi connectivity.

Technical specifications

Heat output (max)	kW	13
Thermal efficiency (nominal)	%	92 / 94
Consumption (min – max)	kg/h	1.4 / 3
Electrical consumption	kW	0.3 / 0.15
Voltage / Frequency	V / Hz	230 / 50
Control		Thermostat

Heating characteristics

Room volume	m ³	325
Can be connected to other rooms via ducts		Yes
Can be used in a combined combustion system		No
Flue gas outlet position		Rear
Fuel: Pellets (diameter)	mm	6
Autonomy (min – max)	h	7.6 / 16
Hopper capacity	kg	22
Intermittent combustion system		Yes

Weight / Dimensions

Net weight	kg	155
Dimensions (width × depth × height)	mm	504×494×1162
Flue outlet (diameter)	cm	8

3 Benefits:

Daily and weekly programming – Remote control – Rear flue outlet – Overheat protection – Thermostat and temperature sensor – Flue gas temperature control – Forced flue exhaust – Automatic cleaning programme.

Daily (2 programmes), weekly (4 programmes) and weekend (2 programmes) independent on/off scheduling.


Ductable model via two rear Ø80 mm outlets, up to a distance of 9 m.

Clean-glass system: an external (secondary) air intake channelled to the inner face of the glass, improving combustion and preventing it from blackening quickly, allowing a better view of the fire.

Double-chamber system: creates an air chamber between the combustion chamber and the outer surface of the stove, reducing the unit's surface temperature, minimising possible thermal shock against walls and creating efficient natural convection.

Modulation system: the model modulates to different power levels once the selected temperature is reached, delivering significant fuel savings. It includes a StandBy system whereby the stove switches off when the desired room temperature is reached and switches on again when that temperature needs to be restored.

4 Installation:

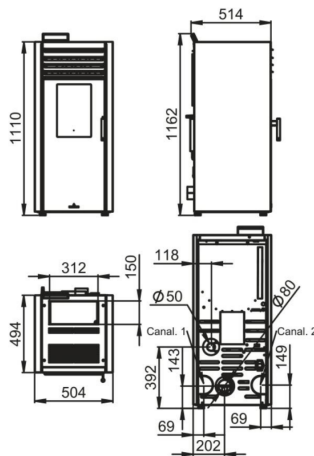

Optional ducting kit

	REF.: KIT-C-15-D	1x130 m³/h	
	(DERECHA)	2x130 m³/h	
		80Ø x 1	
		80Ø x 2	
	REF.: KIT-C-15-I	9 METROS x 1 SALIDA	
	(IZQUIERDA)	9 METROS x 2 SALIDAS	

KIT CANALIZACIÓN | CANALIZATION KIT
KIT CANALIZAÇÃO | KIT CANALIZZAZIONE | KIT DE CANALISATION
 CONTROL DE CANALIZACIÓN MEDIANTE Sonda AMBIENTE
 CHANNELING CONTROL VIA ENVIRONMENTAL PROBE
 CONTRÔLE DE CANALIZAÇÃO VIA Sonda AMBIENTE
 CONTROLLO DI CANALIZZAZIONE TRAMITE Sonda AMBIENTE
 CONTRÔLE DE CANALISATION VIA UNE Sonda AMBIENTE

Ductable model: heats the room where the unit is located as well as another room.

5 Applications

Residential, commercial, office and institutional spaces.